

**POWER BOX RAKE**

# RUCKUS RAKE



[www.amiattachments.com](http://www.amiattachments.com)



**20**  
YEARS  
EST. 2001


# RUCKUS RAKE



## RAKE IN PRODUCTIVITY AND VERSATILITY

The all new Ruckus Rake - Power Box Rake from AMI is a bi-directional, hydraulically powered rotary rake made for your landscaping needs. This skidsteer power box rake is the only one on the market to feature up to 25-degree angling in either direction and 28-degree tilt up and down, so you can pulverize soil, level topsoil or gravel, remove trash, rocks, weeds and long grass or even create ditches and swales with ease. Two motors mean you'll get up to 40% more torque. The unique floating rotor drive system gives you greater rotational speed, and eliminates the need for rotor bearings or chains. Enjoy years-long wear life with road planing teeth made from Tungsten Carbide welded directly to the rotor and pointed to improve pulverizing capability.



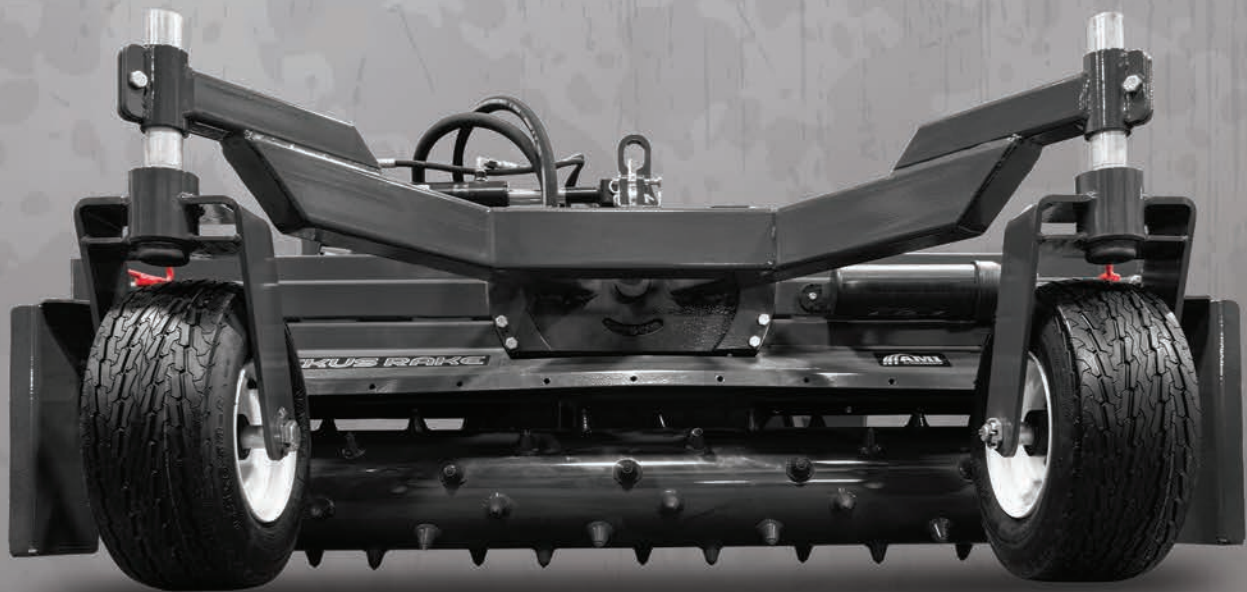

Electric over hydraulic control valve, with built-in relief valve protection for contact with hard objects.



Unique floating rotor design, outfitted with pointed road planing teeth to improve pulverizing capability. Teeth made from tough Tungsten Carbide for years of wear life.



Free Lateral Float as it move over the ground



Lifting lug for easy loading



Jack stand for safe, easy connection and storage



Adjustable side shields for a clean swath or use as a box grader



Ditch cutters on either end provide extended reach and easily move from push to pull with a 1-pin adjustment

- Built-in lock valves prevent the head from drifting out of pre-set position
- Change rotor direction, or tilt and angle the head from inside the cab, using the built-in electronic controls
- Wheels can run on a level surface while the head is tilted
- Available in 60", 72" and 84" rotor widths

# RUCKUS RAKE

## RUCKUS RAKE SPECIFICATIONS CHART

	RR60	RR72	RR84
Ruckus Rake (working width)	60 in	72 in	84 in
Dimensions (WLH)	69 in x 63 in x 34 in	81 in x 63 in x 34 in	93 in x 63 in x 34 in
Weight (lbs)	1150	1220	1280
Cont. PSI	3,000 MAX	3,000 MAX	3,000 MAX
PTO Required	N/A	N/A	N/A
Roto Speed	230-450 RPM	230-450 RPM	230-450 RPM
Hydraulic GPM Range	18-30	18-30	18-30
Rotor Torque @ 2500 PSI	550 ft-lbs	550 ft-lbs	550 ft-lbs
Mount Type	Standard Skidsteer	Standard Skidsteer	Standard Skidsteer
Gauge Wheels Included	2	2	2
Tilt	28° manual or hydraulic	28° manual or hydraulic	28° manual or hydraulic
Angle	25° manual or hydraulic	25° manual or hydraulic	25° manual or hydraulic



**Authorized Dealer**



**1.800.556.9452**

Phone: (519) 699-0387 Fax: (519) 699-0440  
1270 Geddes St., Hawkesville, ON, Canada N0B 1X0

**www.amiattachments.com**



#amiattachments

AMI Attachments reserves the right to add, alter or discontinue products shown, including model specifications, without notice. Pins shown with products are available as an option. Copyright 2023 AMI Attachments Inc.

REVISED JULY 2024  
EEC 1246233 PRINTED IN CANADA