

POWER BOX RAKE

RUCKUS RAKE



www.amiattachments.com




RUCKUS RAKE



RAKE IN PRODUCTIVITY AND VERSATILITY

The all new Ruckus Rake - Power Box Rake from AMI is a bi-directional, hydraulically powered rotary rake made for your landscaping needs. This skidsteer power box rake is the only one on the market to feature up to 25-degree angling in either direction and 28-degree tilt up and down, so you can pulverize soil, level topsoil or gravel, remove trash, rocks, weeds and long grass or even create ditches and swales with ease. Two motors mean you'll get up to 40% more torque. The unique floating rotor drive system gives you greater rotational speed, and eliminates the need for rotor bearings or chains. Enjoy years-long wear life with road planing teeth made from Tungsten Carbide welded directly to the rotor and pointed to improve pulverizing capability.

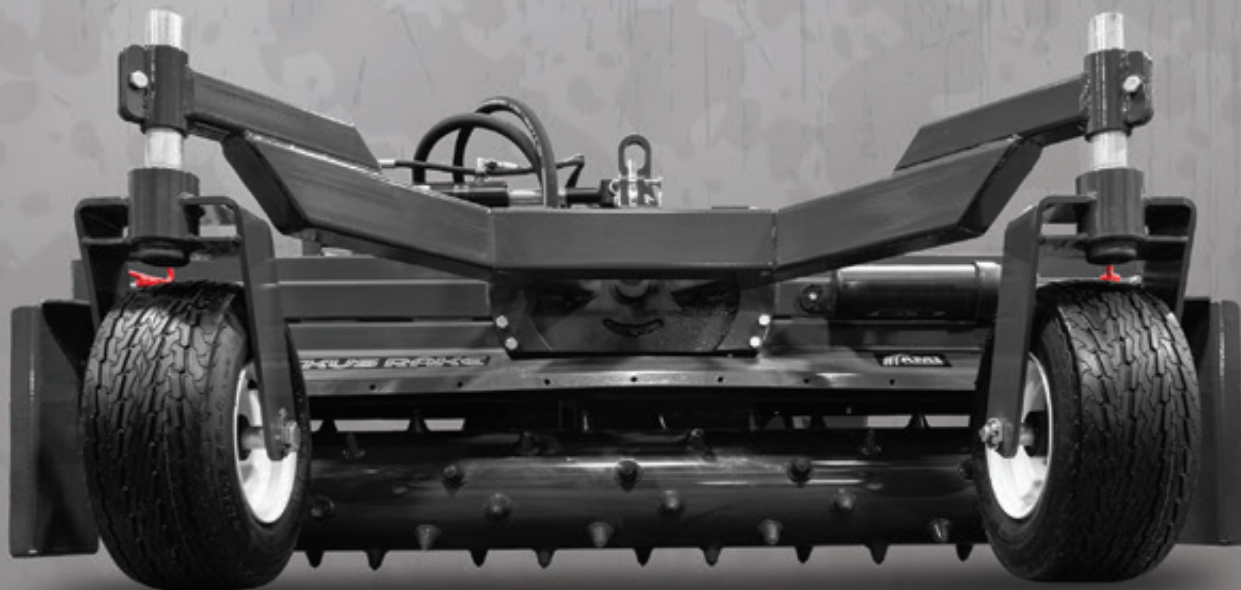

Electric over hydraulic control valve, with built-in relief valve protection for contact with hard objects



Unique floating rotor design with pointed Tungsten Carbide road planing teeth for superior pulverizing capability and years of wear life



Ditch cutters on either end provide extended reach and easily move from push to pull with a 1-pin adjustment



Foam-filled tires provide superior puncture protection against rocks and sharp debris, keeping you productive on even the toughest job sites



Lifting lug for easy loading



Jack stand for safe, easy connection and storage



Adjust side shields for a clean swath or use as a box grader



Free Lateral Float as it move over the ground

- Built-in lock valves prevent the head from drifting out of pre-set position
- Change rotor direction, or tilt and angle the head from inside the cab, using the built-in electronic controls
- Wheels can run on a level surface while the head is tilted
- Available in 60", 72" and 84" rotor widths

RUCKUS RAKE

RUCKUS RAKE SPECIFICATIONS CHART

	RR60	RR72	RR84
Ruckus Rake (working width)	60 in	72 in	84 in
Dimensions (WLH)	69 in x 63 in x 34 in	81 in x 63 in x 34 in	93 in x 63 in x 34 in
Weight (lbs)	1150	1220	1280
Cont. PSI	3,000 MAX	3,000 MAX	3,000 MAX
PTO Required	N/A	N/A	N/A
Roto Speed	230-450 RPM	230-450 RPM	230-450 RPM
Hydraulic GPM Range	18-30	18-30	18-30
Rotor Torque @ 2500 PSI	550 ft-lbs	550 ft-lbs	550 ft-lbs
Mount Type	Standard Skidsteer	Standard Skidsteer	Standard Skidsteer
Gauge Wheels Included	2	2	2
Tilt	28° manual or hydraulic	28° manual or hydraulic	28° manual or hydraulic
Angle	25° manual or hydraulic	25° manual or hydraulic	25° manual or hydraulic



Authorized Dealer



1.800.556.9452

Phone: (519) 699-0387 Fax: (519) 699-0440
1270 Geddes St., Hawkesville, ON, Canada N0B 1X0

www.amiattachments.com



#amiattachments

AMI Attachments reserves the right to add, alter or discontinue products shown, including model specifications, without notice. Pins shown with products are available as an option.
Copyright 2023 AMI Attachments Inc.

REVISED MAY 2026
ECC128945 PRINTED IN CANADA